# Rosemount 2088 Absolute and Gage Pressure Transmitter

- Performance of 0.075% with High Accuracy option
- Lightweight, compact design for cost-effective installation
- Protocols available include 4-20 mA HART<sup>®</sup> and 1-5 Vdc HART Low Power
- Absolute and gage pressure ranges up to 4,000 psi (276 bar)
- Rangeability of 20:1





### Contents

Ordering Information
Specifications page 6
Product Certifications page 8
Dimensional Drawingspage 11





## **Rosemount 2088 Pressure Transmitter Product Offering**









### Proven Reliability for Gage and Absolute Applications

- Available protocols include 4-20 mA HART® and 1-5 Vdc HART Low Power
- Fully Configurable LCD to display process variable, percent of range, and diagnostic messages
- Lightweight, compact design enables easy installation
- Choice of Stainless Steel or Alloy C-276 wetted materials

# Unlock the Value of Devices with the Smart Wireless THUM<sup>™</sup> Adapter

- Gain access to field intelligence and improve quality, safety, availability, operations, and maintenance costs
- Remotely manage devices and monitor health
- Enable new wireless measurement points
- Utilize existing loop power

### Proven, Reliable, and Innovative DP Level Technologies

- Connect to virtually any process with a comprehensive offering of process connections, fill fluids, direct mount or capillary connections and materials
- Quantify and optimize total system performance with QZ option

### Instrument Manifolds – Quality, Convenient, and Easy

- Designed and engineered for optimal performance with Rosemount transmitters
- Save installation time and money with factory assembly
- Offers a variety of styles, materials, and configurations

## **Ordering Information**

Table 1. Rosemount 2088 Pressure Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is manufactured after receipt of order and is subject to additional delivery lead time.

Model	Product description			
Standard				Standard
2088	Pressure Transmitter	*		
Code	Measurement Type			
Standard				Standard
Α	Absolute			*
G	Gage			*
Code	Pressure Ranges			
Standard				Standard
	2088G		2088A	
1	-14.7 to 30 psi /(-1,01 to 2	1 bar)	0 to 30 psi (0 to 2,1 bar)	*
2	-14.7 to 150 psi (-1,01 to 1		0 to 150 psi (0 to 10,3 bar)	*
3	-14.7 to 800 psi (-1,01 to 5		0 to 800 psi (0 to 55,2 bar)	*
4	-14.7 to 4,000 psi (-1,01 to	275,8 bar)	0 to 4,000 psi (0 to 275,8 bar)	*
Code	Transmitter Output		·	
Standard				Standard
S	4–20 mA dc/Digital HART	*		
N	1-5 Vdc Low Power/ Digita	*		
Code	Materials of Constructio	n		
Standard				Standard
	Process connection	Isolating diaphragm	Fill Fluid	
22 <sup>(1)</sup>	316L SST	316L SST	Silicone	*
33 <sup>(1)</sup>	Alloy C-276	Alloy C-276	Silicone	*
Expanded				
2B <sup>(1)</sup>	316L SST	316L SST	Inert	
Code	Process Connection			
Standard				Standard
А	1/2-14 NPT Female			*
B <sup>(2)</sup>	DIN 16288 G 1/2 Male *			*
Expanded				
C <sup>(2)(3)</sup>	RC 1/2 Female (PT 1/2 Fema	ale)		
Standard				Standard
D <sup>(2)(3)</sup>	M20 × 1.5 Male (CM20 Male) ★			*
Code	Conduit Entry			
Standard				Standard
1	1⁄2–14 NPT			*
2 <sup>(2)</sup>	M20 $ imes$ 1.5 Female			*
Expanded				
4 <sup>(2)</sup>	G 1/2 Female (PF 1/2 Femal	e)		

Table 1. Rosemount 2088 Pressure Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is manufactured after receipt of order and is subject to additional delivery lead time.

**Options** (Include with selected model number)

-	seal assemblies			
Standard		Ctondord		
		Standard		
S1 <sup>(4)(5)</sup>	Assemble to one Rosemount 1199 diaphragm seal			
Display and	a Interface			
Standard		Standard		
M5	LCD display, configured for percent of range	*		
M7	LCD display, configured for engineering units	*		
Mounting b	rackets			
Standard		Standard		
B4	SST mounting bracket with SST Bolts	*		
Product Ce	-			
Standard		Standard		
C6	CSA Explosion-Proof, Intrinsically Safe, and non-Incendive			
E2	INMETRO Flameproof	*		
E4 <sup>(2)(6)</sup>	TIIS Flameproof			
		*		
E5	FM Explosion-Proof, Dust Ignition-proof IECEx Flameproof	*		
E7		*		
ED 11 <sup>(2)</sup>	ATEX Flameproof	*		
	ATEX Intrinsic Safety	*		
12	INMETRO Intrinsic Safety	*		
15	FM Intrinsically safe, Division 2	*		
17	SAA Intrinsic Safety	*		
K1	ATEX Flameproof, Intrinsic Safety, Type n, Dust	*		
K5	FM Explosion-Proof, Dust Ignition-proof, Intrinsically Safe, Division 2	*		
K6 <sup>(2)</sup>	ATEX and CSA Explosion-Proof, Dust Ignition-proof, Intrinsically Safe, Division 2	*		
K7	SAA Intrinsic Safety and Type n; IECEx Flameproof and Dust	*		
KB	FM and CSA Explosion-Proof, Dust Ignition-proof, Intrinsically Safe, Division 2	*		
KH <sup>(2)</sup>	FM Approvals and ATEX Explosion-Proof and Intrinsically Safe	*		
N1 <sup>(2)</sup>	ATEX Type n	*		
N7	SAA Type n	*		
ND <sup>(2)</sup>	ATEX Dust	*		
NK	IECEx Dust	*		
Shipboard	Approvals			
Standard		Standard		
SBS	American Bureau of Shipping (ABS) Type Approval	*		
SBV	Bureau Veritas (BV) Type Approval	*		
SDN	Det Norske Veritas (DNV) Type Approval	*		
SLL	Lloyd's Register (LR) Type Approval	*		
Pressure T				
Expanded				
P1	Hydrostatic testing			
Terminal B	, , ,			
Standard		Standard		
T1	Transient protection	*		
Special Cle		*		
	anny			
Expanded				
P2	Cleaning for special service			

Table 1. Rosemount 2088 Pressure Transmitter Ordering Information

★ The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is manufactured after receipt of order and is subject to additional delivery lead time.

Calibration	Certificate	
Standard		Standard
Q4	Calibration certificate	*
Quality Cal	ibration Certificate Traceability Certification	
Standard		Standard
Q8	Material Traceability Certification per EN 10204 3.1B	*
<b>Digital Sign</b>	al	
Standard		Standard
C4 <sup>(2)</sup>	NAMUR alarm and saturation levels, high alarm	*
CN <sup>(2)</sup>	NAMUR alarm and saturation levels, low alarm	*
Configurati	on	
Standard		Standard
C9	Software configuration	*
Manifold As	ssemblies	
Standard		Standard
S5 <sup>(4)(5)</sup>	Assemble to Rosemount 306 integral manifold	*
Calibration	Accuracy	
Standard		Standard
P8 <sup>(7)</sup>	0.075% accuracy to 10:1 turndown	*
Water Appr	oval	
Standard		Standard
DW <sup>(8)</sup>	NSF drinking water approval	*
Low Output	for Low Power	
Expanded		
C2	0.8 - 3.2 Vdc output with HART protocol	
Surface Fin	ish	
Standard		Standard
Q16	Surface finish certification for sanitary remote seals	*
Toolkit Tota	I System Performance Reports	
Standard		Standard
QZ	Remote Seal System Performance Calculation Report	*
Typical Mo	del Number: 2088 G 2 S 22 A 1 B4 M5	

(1) Materials of Construction comply with recommendations per NACE MR0175/ISO 15156 for sour oil field production environments. Environmental limits apply to certain materials. Consult latest standard for details. Selected materials also conform to NACE MR0103 for sour refining environments.

(2) Not available with low-power Output code N.

(3) Not available with Alloy C-276, Materials of Construction code 33.

(4) Use <sup>1</sup>/<sub>2</sub> - 14 NPT Female Process Connection code A.

(5) "Assemble-to" items are specified separately and require a completed model number.

(6) Only available with Conduit Thread code 4.

(7) Available with Output code S, stainless steel isolators, and silicone fill.

(8) Requires Materials of Construction code 22 with Process Connection code A.

## **Specifications**

### **Performance Specifications**

(Zero-based spans, reference conditions, silicone oil fill, and 316L SST isolating diaphragm.)

#### **Reference Accuracy**

- ±0.10% of calibrated span. Includes combined effects of linearity, hysteresis, and repeatability
- ±0.075% of calibrated span (high accuracy option)

#### **Ambient Temperature Effect**

Expressed as a total effect per 50 °F (28 °C) Total effect includes zero and span effects.

± (0.15% URL + 0.15% of span) from –40 °F to 185 °F (-40 °C to 85 °C)

#### Stability

±0.10% of URL for 12 months

#### Vibration Effect

Less than  $\pm 0.1\%$  of URL when subjected to vibration of: peak to peak constant displacement of 4 mm (5–15 Hz) and constant acceleration of 2 g (15–150 Hz) and 1 g (150–2000 Hz).

#### **Power Supply Effect**

Less than 0.01% of calibrated span per volt

#### **Mounting Position Effect**

Zero shift of up to 1.2 inH $_2\text{O}$  (0.30 kPa), which can be calibrated out. No span effect.

#### **RFI Effect**

Less than  $\pm 0.25\%$  of upper range limit from 20–1000 MHz at 30 V/m with leads in conduit. Less than  $\pm 0.25\%$  of upper range limit from 20-1000 MHz at 10 V/m with unshielded twisted pair (no conduit).

#### **Transient Protection Limits**

#### IEEE 587 Category B

6 kV Crest (1.2  $\times$  50  $\mu s)$  3 kA Crest (8  $\times$  20  $\mu s)$  6 kV Crest (0.5  $\mu s$  by 100 kHz)

IEEE 472 SWC 2.5 kV Crest,1 MHz waveform

#### **General Specifications**

Tested to IEC 801-3

## **Functional Specifications**

#### Service

Liquid, gas, and vapor applications

Range	Minimum	Upper	Lower	Lower <sup>(1)</sup>
	Span	(URL)	(LRL)	(LRL) (Gage)
1	1.5 psi	30 psi	0 psia	–14.7 psig
	(0,103 bar)	(2,1 bar)	(0 bar)	(–1,01 bar)
2	8 psi	150 psi	0 psia	–14.7 psig
	(0,55 bar)	(10,3 bar)	(0 bar)	(–1,01 bar)
3	40 psi	800 psi	0 psia	–14.7 psig
	(2,76 bar)	(55,2 bar)	(0 bar)	(–1,01 bar)
4	200 psi	4000 psi	0 psia	–14.7 psig
	(13,8 bar)	(275,8 bar)	(0 bar)	(–1,01 bar)

(1) Assumes atmospheric pressure of 14.7 psig.

#### Output

Code S: 4–20 mA dc Code N: 1-5 volt dc, low power (Outputs are directly proportional to the input pressure)

#### Rangedown

20 to 1


#### Load Limitations

Reverse polarity protection is standard. Maximum loop resistance is determined by the power supply voltage as described by the following equations:

#### Power Supply

External power supply required. Transmitter operates on 10.5–36 Vdc with no load (6–14 V for Low Power). Reverse polarity protection is standard.

Max. Loop Resistance = 43.5 (Power Supply Voltage - 10.5)



The Field communicator requires a minimum loop resistance of  $250\Omega$  for communication.

#### **Current Draw**

Output Code N:  $\leq$  3 mA without LCD display.

#### **Overpressure Limits**

Range 1: 120 psig max All other ranges: two times the URL 00813-0100-4690, Rev LB August 2011

## Rosemount 2088

#### **Burst Pressure**

11,000 psi for all ranges

#### Zero Elevation and Suppression

Zero can be suppressed between atmosphere for gage transmitters or 0 psia for absolute transmitters and upper range limit, provided the calibrated span is equal to or greater than the minimum span, and the upper range value does not exceed the upper range limit.

#### **Time Response**

Time Constant: 200 milliseconds Dead time: < 0.1 s Update rate: 20 times per second minimum

#### **Temperature Limits**

#### Ambient:

-40 to 185 °F (-40 to 85 °C) -4 to 175 °F (-20 to 80 °C) with LCD display<sup>(1)</sup>

 LCD display may not be readable and LCD updates will be slower at temperatures below -4 °F (-20 °C).

#### Storage:

-50 to 230 °F (-46 to 110 °C) -40 to 185 °F (-40 to 85 °C) with LCD display

Process:

Silicone fill sensor: -40 to 250 °F (-40 to 121 °C)<sup>(1)</sup> Inert fill sensor: -22 to 250 °F (-30 to 121 °C)<sup>(1)</sup>

Process temperatures above 185 °F (85 °C) require derating the ambient limits by a 1.5:1 ratio. For example, for process temperature of 195 °F (91 °C), new ambient temperature limit is equal to 170 °F (77 °C). This can be determined as follows: (195 °F - 185 °F) x 1.5 = 15 °F, 185 °F - 15 °F = 170 °F

 250 °F (140 °C) limit in vacuum service; 130 °F (54 °C) for pressures below 0.5 psia.

#### **Humidity Limits**

0-100% relative humidity

#### **Volumetric Displacement**

Less than 0.00042 cm<sup>3</sup>

**Turn-on Time** 2.0 seconds, no warm-up required

#### **Transmitter Security**

Activating the transmitter security function prevents changes to the transmitter configuration, including local zero and span adjustments. Security is activated by an internal switch.

#### **Failure Mode**

If self-diagnostics detect a sensor or microprocessor failure, the analog signal is driven either high or low to alert the user. High or low failure mode is user-selectable with a jumper on the transmitter. The values to which the transmitter drives its output in failure mode depend on whether it is factory-configured to *standard* or *NAMUR-compliant* operation. The values for each are as follows:

Standard Operation
--------------------

Output Code	Line	ar Output	Fa	il High	F	ail Low
S	3.9 ≤	$l \leq 20.8$	l≥	21.75 mA	I	≤ 3.75 mA
Ν	0.97	$\leq V \leq 5.2$	V	≥ 5.4 V	٧	′ ≤ 0.95 V
N with Code C2	0.78	$\leq V \leq 3.44$	V	≥4.0 V	٧	′ ≤ 0.77 V
NAMUR-Compli	ant					
Operation		Linear Out	put	Fail High		Fail Low
Output Code S		$3.8 \le I \le 20$	5	l ≥ 22.5 mA	١.	$I \le 3.6 \text{ mA}$

### **Physical Specifications**

#### **Electrical Connection**

 $^{1/2}$ –14 NPT, M20  $\times$  1.5 (CM20), or G  $^{1/2}$  female (PF  $^{1/2}$  female) conduit entry

#### **Process Connection**

 $^{1/2}\text{--}14$  NPT female, DIN 16288 G  $^{1/2}$  male, RC  $^{1/2}$  female (PT  $^{1/2}$  female), M20  $\times$  1.5 (CM20) male

#### **Process Wetted Parts**

Isolating Diaphragm

316L stainless steel or Alloy C-276

#### **Process Connector**

316L stainless steel CF-3M (Cast version of 316L SST, material per ASTM\_A743) or Alloy C-276

#### Non-wetted Parts

#### Electronics Housing Low-copper aluminum, NEMA 4X, IP65, IP67,CSA enclosure Type 4X

Paint Polyurethane

Cover O-rings Buna-N

Fill Fluid

Silicone or inert fill

Weight

Output Code S and N: Approximately 2.44 lb (1.11 kg)

## Rosemount 2088

## **Product Certifications**

### **Approved Manufacturing Locations**

Rosemount Inc. — Chanhassen, Minnesota, USA Emerson Process Management GmbH & Co. — Wessling, Germany Emerson Process Management Asia Pacific Private Limited — Singapore Beijing Rosemount Far East Instrument Co., LTD — Beijing, China

### **European Directive Information**

The EC declaration of conformity can be found at www.rosemount.com.

- ATEX Directive (94/9/EC) Emerson Process Management complies with the ATEX Directive.
- European Pressure Equipment Directive (PED) (97/23/EC) 2088/2090 Pressure Transmitters — Sound Engineering Practice
- *Electro Magnetic Compatibility (EMC) (2004/108/EC)* All Model 2088/2090 Pressure Transmitter: EN 61326-1:2006

## **Hazardous Locations Certifications**

#### **North American Certifications**

Ordinary Location Certification for Factory Mutual

As standard, the transmitter has been examined and tested to determine that the design meets basic electrical, mechanical, and fire protection requirements by FM, a nationally recognized testing laboratory (NRTL) as accredited by the Federal Occupational Safety and Health Administration (OSHA).

#### Factory Mutual (FM) Approvals

- E5 Explosion-Proof for Class I, Division 1, Groups B, C, and D. Dust-Ignition-Proof for Class II, Division 1, Groups E, F, G, Class III, Division 1, indoor and outdoor (NEMA 4X) hazardous locations; factory sealed. Temperature Class T5 Ta = 85 °C.
- Intrinsically safe for use in Class I, Division 1, Groups A, B, C, D; Class II, Division 1, Groups E, F, and G; and Class III, Division 1 when connected in accordance with Rosemount drawing 02088-1018. Non-incendive for Class I, Division 2, Groups A, B, C, and D.

For input parameters see control drawing 02088-1018. Temperature Class T4 Ta = 85  $^{\circ}$ C; indoor and outdoor (NEMA 4X) hazardous locations.

Canadian Standards Association (CSA)

All CSA hazardous approved transmitters are certified per ANSI/ISA 12.27.01-2003.

C6 Explosion-Proof for Class I, Division 1, Groups B, C, and D. Dust-Ignition-Proof for Class II, Division 1, Groups E, F, G, Class III, indoor and outdoor hazardous locations. CSA enclosure Type 4X; factory sealed. Suitable for Class I, Division 2, Groups A, B, C, and D. 2088 is Single Seal. Intrinsically Safe for Class I, Division 1, Groups A, B, C, and D. Temp. Code T3C. Intrinsically safe when connected with approved barriers in accordance with Rosemount drawing 02088-1024. 2088 is Single Seal. For input parameters see control drawing 02088-1024.

#### **European Certifications**

Table 2. Input Parameters

Loop/Power
$U_i = 30 \text{ Vdc}$
l <sub>i</sub> = 200 mA
P <sub>i</sub> = 0.9 W
C <sub>i</sub> = 0.012 μF

#### Special Conditions For Safe Use (x):

When the optional transient protection terminal block is installed, the apparatus is not capable of withstanding a 500 V root-mean-square test to case. This must be taken into account on any installation in which it is used, for example by assuring that the supply to the apparatus is galvanically isolated.

N1 BASEEFA ATEX Type n

Certification No.: BAS00ATEX3167X  $\bigotimes$  II 3 G Ex nA nL IIC T5 (-40 °C ≤ T<sub>amb</sub> ≤ 70 °C) U<sub>i</sub> = 50 Vdc max

#### CE

#### Special Conditions For Safe Use (x):

When the optional transient protection terminal block is installed, the apparatus is not capable of withstanding a 500 V root-mean-square test to case. This must be taken into account on any installation in which it is used, for example, by assuring that the supply to the apparatus is galvanically isolated.

00813-0100-4690, Rev LB August 2011

ND BASEEFA ATEX Dust Certificate No.: BAS01ATEX1427X ( II 1 D Ex tD A20 T105 °C (−20 °C ≤ T<sub>amb</sub> ≤ 85 °C)

IP66 **€€** 1180 Vmax = 36 Vdc

#### Special Conditions For Safe Use (x):

- The user must ensure that the maximum rated voltage and current (36 volts, 24 mA, D.C.) are not exceeded. All connections to other apparatus or associated apparatus shall have control over this voltage and current equivalent to a category "ib" circuit according to EN50020.
- 2. Cable entries must be used which maintain the ingress protection of the enclosure to at least IP66.
- Unused cable entries must be filled with suitable blanking plugs which maintain the ingress protection of the enclosure to at least IP66.
- Cable entries and blanking plugs must be suitable for the ambient range of the apparatus and capable of withstanding a 7J impact test.
- 5. The 2088/2090 sensor module must be securely screwed in place to maintain the ingress protection of the enclosure.

#### ED KEMA ATEX Flameproof

Certification No.: KEMA97ATEX2378 O II 1/2 G Ex d IIC T6 (-40 °C ≤ T<sub>amb</sub> ≤ 40 °C) T4 (-40 °C ≤ T<sub>amb</sub> ≤ 40 °C) C¢ 1180 Vmax = 36 (with Output Code S) Vmax = 14 (with Output Code N)

#### Special Conditions for Safe Use (x):

- 1. The cable and conduit entry devices shall be of a certified flameproof type Ex d, suitable for the conditions of use and correctly installed.
- 2. With the use of conduit entries a sealing device shall be provided immediately on the entrance thereto.
- 3. Unused apertures shall be closed with suitable Ex d certified blanking elements.
- 4. Suitable heat-resisting cables shall be used when the ambient temperature at the cable or conduit entries exceed 65 °C.
- 5. This device contains a thin wall diaphragm. Installation, maintenance, and use shall take into account the environmental conditions to which the diaphragm will be subjected. The manufacturer's instructions for installation and maintenance shall be followed in detail to assure safety during its expected lifetime.
- 6. For information on the dimensions of the flameproof joints the manufacturer shall be contacted.

#### **Japanese Certifications**

- E4 TIIS Flameproof
  - Ex d IIC T6 (T<sub>amb</sub> = 85 °C)

Certificate	Description
TC15874	2088 with Alloy C-276 wetted parts (with display)
TC15873	2088 with Alloy C-276 wetted parts (no display)
TC15872	2088 with SST wetted parts (with display)
TC15871	2088 with SST wetted parts (no display)

#### **Australian Certifications**

17

SAA Intrinsic Safety Certification No.: AUS Ex 1249X Ex ia IIC T4 (T<sub>amb</sub> = 70 °C) Ex ia IIC T5 (T<sub>amb</sub> = 40 °C) IP66 When connected per Rosemount drawing 03031-1026

#### Table 3. Input Parameters

Loop/Power
U <sub>max</sub> = 30 V
I <sub>max</sub> = 200 mA
P <sub>max</sub> = 0.9 W
C <sub>i</sub> = 0.01 μF
L <sub>i</sub> = 10 μH

#### Special Conditions For Safe Use (X):

Observe barrier/entity parameters during installation. A passive current limited power source must be used. The power source must be such that  $Po \le (Uo * Io)/4$ . For modules using transient protection in the terminal assembly (T1 transient protection models), the apparatus enclosure is to be electrically bonded to the protective earth. The conductor used for the connection shall be equivalent to a copper conductor of 4 mm<sup>2</sup> minimum cross-sectional area.

N7 SAA Type n (Non-Sparking)

Certificate No.: AUS Ex 1249X Ex n IIC T4 (T<sub>amb</sub> = 70 °C) Ex n IIC T5 (T<sub>amb</sub> = 40 °C) IP66

#### Special Conditions For Safe Use (X):

Where the equipment is installed such that there is an unused conduit entry, it must be sealed with a suitable blanking plug to maintain the IP66 degree of protection. Any blanking plug used with the equipment shall be of a type which requires the use of a tool to affect its removal. Voltage source shall not exceed 60 Vac or 75 Vdc.

## Rosemount 2088

E7 KEMA IECEx Flameproof Certification No.: IECEx KEM 06.0021X Ex d IIC T4 (-40 °C  $\leq T_{amb} \leq 80$  °C) C€ 1180 Vmax = 36 (with Output Code S)

Vmax = 14 (with Output Code N) NK IECEx Dust Ignition Proof IECEx Certificate number: IECEx KEM 06.0021X Ex tD A22 IP66 T90 °C(T<sub>amb</sub> = -20 °C to 80 °C)

Vmax = 55 Vdc

li = 23 mA

#### Special Conditions For Safe Use (x):

- The device contains a thin wall diaphragm. Installation, maintenance, and use shall take into account the environmental conditions to which the diaphragm will be subjected. The manufacturer's instructions for installation and maintenance shall be followed in detail to assure safety during its expected lifetime.
- 2. Cable entries must be used which maintain the ingress protection of the enclosure to at least IP 66.
- 3. Unused cable entries must be used which maintain the ingress protection of the enclosure to at least IP 66.
- Cable entries and blanking plugs must be suitable for the ambient range of the apparatus and capable of withstanding a 7J impact.
- 5. The 2088/2090 sensor module must be securely screwed in place to maintain the ingress protection of the enclosure

#### **Brazil Certifications**

I2 INMETRO Intrinsic Safety Certification No.: CEPEL-Ex-063/97-1X BR-Ex ia IIC T5/T4

#### Special Conditions For Safe Use (x):

Only the sensor piezo-resistive can be installed in Zone 0. The transmitter must be installed in Zone 1 or 2.

E2 INMETRO Flameproof Certification No.: CEPEL-Ex-076/97-1 BR-Ex d IIC T6/T5

#### **China Certifications**


- I3 China (NEPSI) Intrinsic Safety Ex ia IIC T4
- E3 China (NEPSI) Flameproof Ex d IIB + H2 T4/T5

#### **Combinations of Certifications**

Stainless steel certification tag is provided when optional approval is specified. Once a device labeled with multiple approval types is installed, it should not be reinstalled using any other approval types. Permanently mark the approval label to distinguish it from unused approval types.

- **KB** Combination of K5 and C6
- KH Combination of K5, I1, and ED
- K5 Combination of E5 and I5
- K6 Combination of C6, I1, and ED
- K7 Combination of I7, N7, E7, and NK
- K1 Combination of I1, N1, ED, and ND

## **Dimensional Drawings**

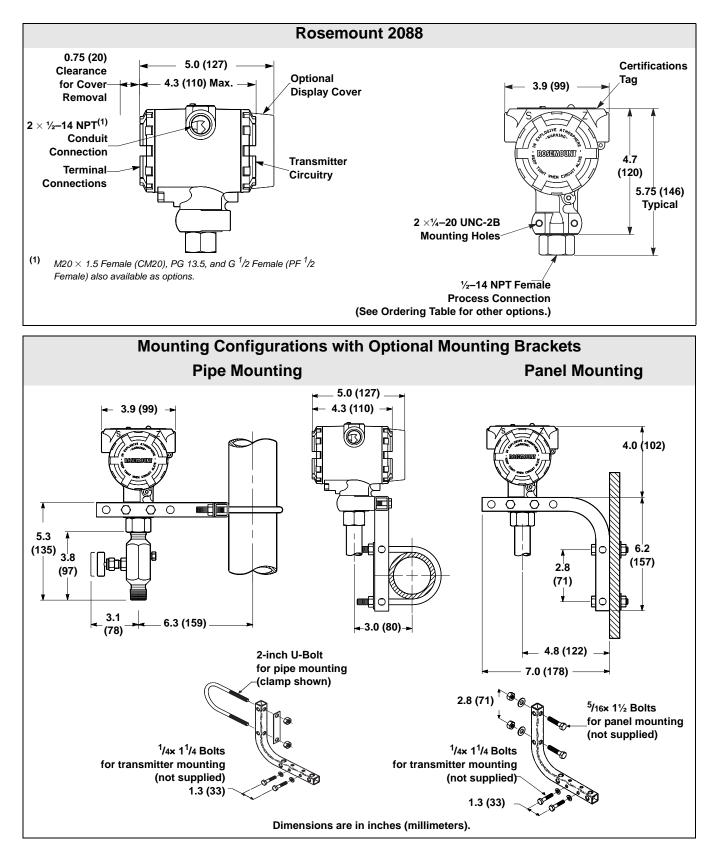

## OPTIONS

#### **Standard Configuration**

Unless otherwise specified, transmitter is shipped as follows:

ENGINEERING UNITS	psi (all ranges)
4 mA (1 Vdc):	0 (engineering units)
20 mA (5 Vdc):	Upper range limit
Output:	Linear
Flange type:	Specified model code option
Flange material:	Specified model code option
O-ring material:	Specified model code option
Drain/vent:	Specified model code option
LCD Display:	Installed or none
Alarm:	High
Software tag:	(Blank)

#### **Custom Configuration**

If Option Code C9 is ordered, the customer may specify the following data in addition to the standard configuration parameters.

- Output Information
- Transmitter Information
- · LCD display Configuration
- Hardware Selectable Information
- Signal Selection

Refer to the "Rosemount 2088 Configuration Data Sheet" document number 00806-0100-4690.

#### Tagging (3 options available)

- Standard SST hardware tag is permanently affixed on transmitter. Tag character height is 0.125 in. (3,18 mm), 84 characters maximum.
- Tag may be wired to the transmitter nameplate upon request, 85 characters maximum.
- For HART protocols, the tag may be stored in transmitter memory (eight characters maximum). Software tag is left blank unless specified.

#### **Optional Rosemount 306 Integral Manifold**

Factory assembled to 2088 transmitters. Refer to Product Data Sheet (document number 00813-0100-4733 for Rosemount 306) for additional information.

#### **Other Seals**

Refer to Product Data Sheet (document number 00813-0100-4016 or 00813-0201-4016) for additional information.

#### **Output Information**

Output range points must be the same unit of measure. Available units of measure include:

inH <sub>2</sub> 0	inH2O@4 °C <sup>(1)</sup>	psi	Ра
inHg	ftH <sub>2</sub> 0	bar	kPa
mmH <sub>2</sub> 0	inH2O@4 °C <sup>(1)</sup>	mbar	torr
mmHg	g/cm <sup>2</sup>	kg/cm <sup>2</sup>	atm

(1) Only available on 4-20mA HART.

#### **Display and Interface Options**

M5 LCD Display, Configured for Percent of Range

M7 LCD Display, Configured for Engineering Units

- 2-Line, 5-Digit LCD for 4-20 mA HART
- 1-Line, 4-Digit LCD for 1-5 Vdc HART Low Power
- · Direct reading of digital data for higher accuracy
- · Displays user-defined flow, level, volume, or pressure units
- · Displays diagnostic messages for local troubleshooting
- · 90-degree rotation capability for easy viewing

#### **Transient Protection**

T1 Integral Transient Protection Terminal Block Meets IEEE C62.41, Category Location B 6 kV crest (0.5  $\mu$ s - 100 kHz)

3 kV crest (8 × 20 microseconds)

6 kV crest (1.2 × 50 microseconds)

#### **Rosemount 2088 Bracket Option**

B4 Bracket for 2-in. Pipe or Panel Mounting

- Bracket for mounting of transmitter on 2-in. pipe or panel
- Stainless steel construction with stainless steel bolts

Standard Terms and Conditions of Sale can be found at www.rosemount.com\terms\_of\_sale The Emerson logo is a trade mark and service mark of Emerson Electric Co. Rosemount, the Rosemount logotype, Annubar, ProPlate and Mass ProPlate are registered trademarks of Rosemount Inc. HART is a registered trademark of the HART Communications Foundation. PlantWeb is a registered trademark of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.

© 2011 Rosemount, Inc. All rights reserved.

**Emerson Process Management Rosemount Measurement** 8200 Market Boulevard Chanhassen MN 55317 USA Tel (USA) 1 800 999 9307 
 Switzerland

 Tel (USA) 1 800 999 9307
 Switzerland

 Tel (International) +1 952 906 8888
 Tel +41 (0) 41 768 6111

 Fax +1 952 949 7001
 Fax +41 (0) 41 768 6300

**Emerson Process Management** Blegistrasse 23 P.O. Box 1046 CH 6341 Baar

Emerson FZE P.O. Box 17033 Jebel Ali Free Zone Dubai UAE Tel +971 4 811 8100 Fax +971 4 886 5465 **Emerson Process Management Asia Pacific** Pte Ltd 1 Pandan Crescent Singapore 128461 Tel +65 6777 8211 Fax +65 6777 0947 Service Support Hotline : +65 6770 8711 Email : Enquiries@AP.EmersonProcess.com



00813-0100-4690 Rev LB, 8/11

A.P.O. - ELMOS v.o.s., Pražská 90, 509 01 Nová Paka, Tel.: +420 493 504 261, Fax: +420 493 504 257, E-mail: apo@apoelmos.cz, Internet: www.apoelmos.cz